

# Duraslick\* Series

## Low Fouling NF/RO Elements

Duraslick\* is a family series of membrane elements engineered for use with fouling-prone brackish water applications and industrial effluent treatment before reuse or discharge. Duraslick\* is designed to utilize an innovative three-layer membrane, of which a proprietary middle layer creates extreme smoothness, and provide a high rejection of salts.

Independent studies have demonstrated that Duraslick\* elements are superior to standard polyamide spiral wound membrane elements for salt removal in fouling environment. Duraslick\* elements retrofit existing systems to obtain stable permeate flux, reduced overall energy usage, increased membrane service life and an extension of operating time between required cleanings, which in turn reduces expenditures on required chemicals.

**Table 1: Element Specification**

Membrane	Thin-film membrane (TFM*)
----------	---------------------------

Model	Average permeate flow gpd (m3/day) <sup>1,2</sup>	Average NaCl rejection <sup>1,2</sup>	Minimum NaCl rejection <sup>1,2</sup>
Duraslick RO 2540	550 (2.1)	98.6%	97.0%
Duraslick RO 4040	1,800 (6.8)	98.6%	97.0%
Duraslick RO 8040	7,700 (29.1)	98.6%	97.0%

<sup>1</sup> Average salt rejection after 24 hours operation. Individual flow rate may vary +25%/-25%.


<sup>2</sup> Testing conditions: 800ppm NaCl solution at 225psig (1,551 kPa) operating pressure, 77°F (25°C), pH7.5 and 15% recovery.

Model	Average permeate flow gpd (m3/day) <sup>1,2</sup>	Average MgSO4 rejection <sup>1,2</sup>	Minimum MgSO4 rejection <sup>1,2</sup>
Duraslick NF 2540	600 (2.3)	98.6%	96.0%
Duraslick NF 4040	1,900 (7.2)	98.6%	96.0%
Duraslick NF 8040	8,600 (32.6)	98.6%	96.0%


<sup>1</sup> Average salt rejection after 24 hours operation. Individual flow rate may vary +25%/-25%.

<sup>2</sup> Testing conditions: 2,000ppm MgSO<sub>4</sub> solution at 110psi (760kPa) operating pressure, 77°F (25°C), pH7.5 and 15% recovery.

Model	Spacer mil (mm)	Active area ft <sup>2</sup> (m <sup>2</sup> )	Outer wrap	Part number
Duraslick RO 2540	30 (0.76)	24 (2.2)	Fiberglass	1231055
Duraslick RO 4040	30 (0.76)	80 (7.4)	Fiberglass	1231048
Duraslick RO 8040	30 (0.76)	355 (33.0)	Fiberglass	1231014
Duraslick NF 2540	30 (0.76)	24 (2.2)	Fiberglass	1234385
Duraslick NF 4040	30 (0.76)	80 (7.4)	Fiberglass	1234307
Duraslick NF 8040	30 (0.76)	355 (33.0)	Fiberglass	1234182

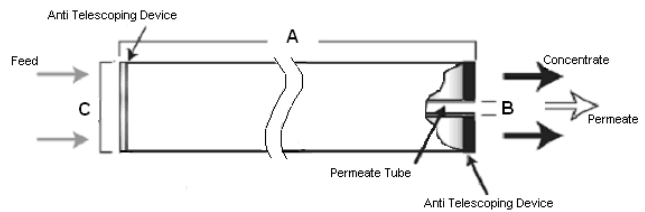

**Figure 1: Element Dimensions Diagram - 8040**

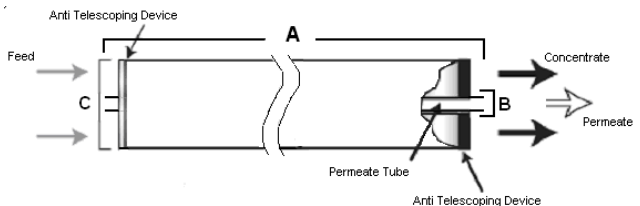

**Figure 2: Element Dimensions Diagram - 2540 & 4040**

a product of  
**ecomagination**<sup>SM</sup>



Find a contact near you by visiting [www.ge.com/water](http://www.ge.com/water) and clicking on "Contact Us".  
\* Trademark of General Electric Company; may be registered in one or more countries.  
©2011, General Electric Company. All rights reserved.

**Table 2: Dimensions and Weight**

Model <sup>1</sup>	Dimensions, inches (cm)			Boxed
	A	B <sup>2</sup>	C <sup>3</sup>	Weight lbs (kg)
Duraslick XX 2540	40.0 (101.6)	0.75 (1.9) OD	2.4 (6.1)	4 (1.8)
Duraslick XX 4040	40.0 (101.6)	0.75 (1.9) OD	3.9 (9.9)	9 (4.1)
Duraslick XX 8040	40.0 (101.6)	1.125 (2.86)	7.9 (20.0)	29 (13.2)

<sup>1</sup> These elements are dried and bagged before shipping.

<sup>2</sup> Internal diameter.

<sup>3</sup> The element diameter (dimension C) is designed for optimum performance in GE pressure vessels. Others pressure vessel dimension and tolerance may result in excessive bypass and loss of capacity.

**Table 3: Operating and CIP parameters**

Typical Operating Pressure	Duraslick RO: 200psi (1,379 kPa) Duraslick NF: 100psi (690 kPa)
Typical Operating Flux	10-15GFD (15-25LMH)
Maximum Operating Pressure	600psi (4,137 kPa)
Maximum Temperature	Continuous Operation: 122°F (50°C) Duraslick RO Clean-In-Place: 122°F (50°C) Duraslick NF Clean-In-Place: 104°F (40°C)
pH Range	Duraslick RO: Continuous Operation: 4.0 – 10.0 Clean-In-Place (CIP): 2.0 – 10.5 Duraslick NF: Continuous Operation: 3.0 – 9.0 Clean-In-Place (CIP): 2.0 – 10.5
Maximum Pressure Drop	Over an element: 12psi (83 kPa) Per housing: 50psi (345 kPa)
Chlorine Tolerance	500 ppm-hrs, dechlorination recommended
Feedwater	NTU < 1 SDI < 5